



FIG. 1

A

G1

4a(4)

52

11a(11)

G2

M

32(3)

11b(1)

FIG. 2A


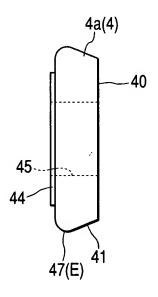
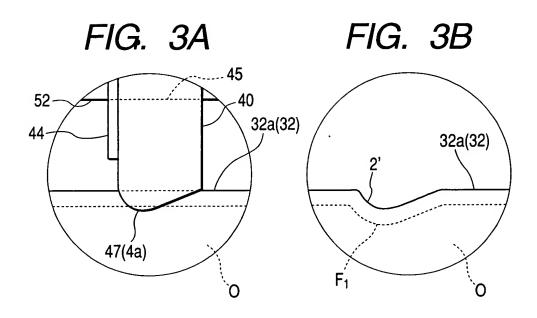
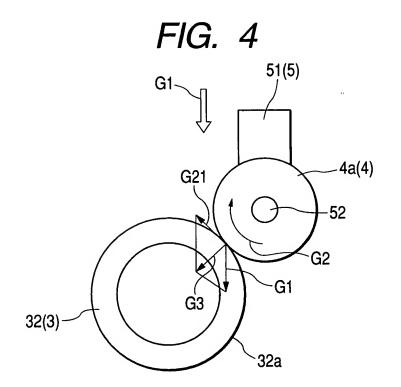
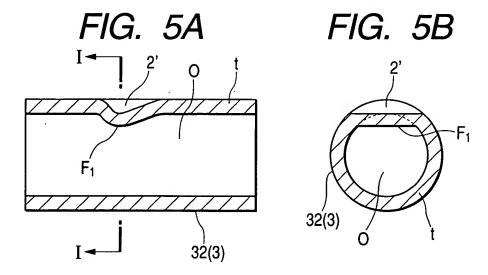



FIG. 2B












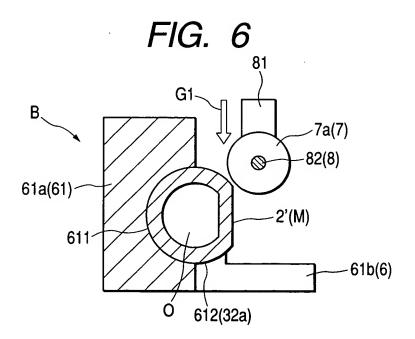

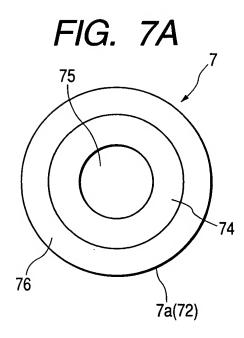

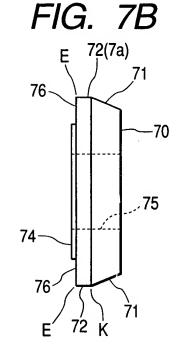

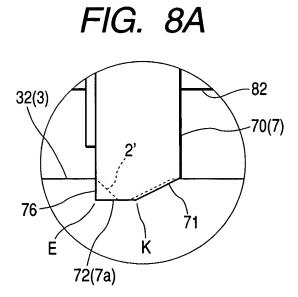

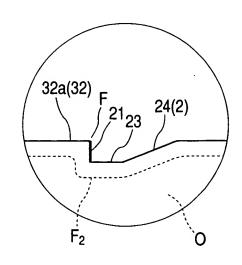



FIG. 8B


FIG. 9A


23(2) 24 23 F<sub>2</sub>


32(3)

FIG. 9B



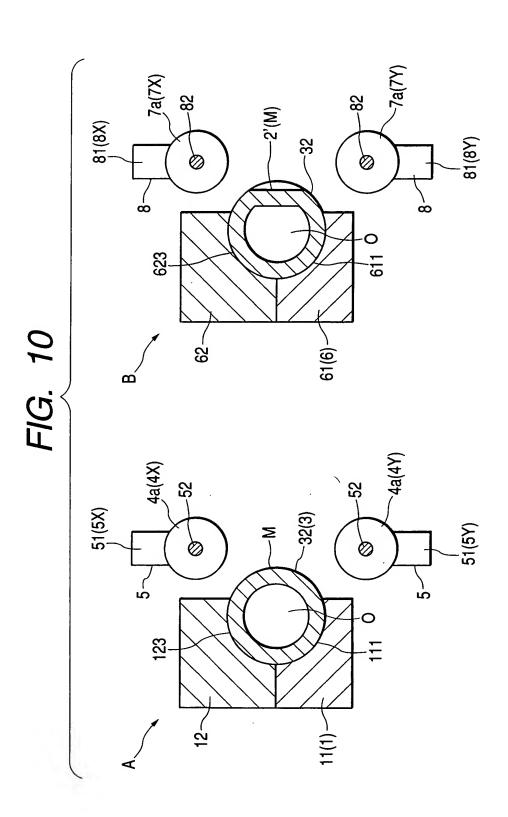

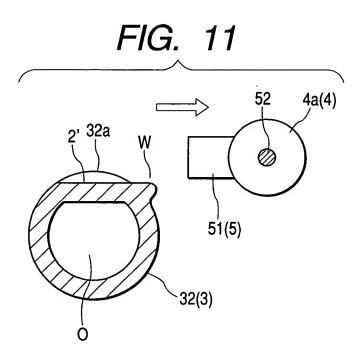


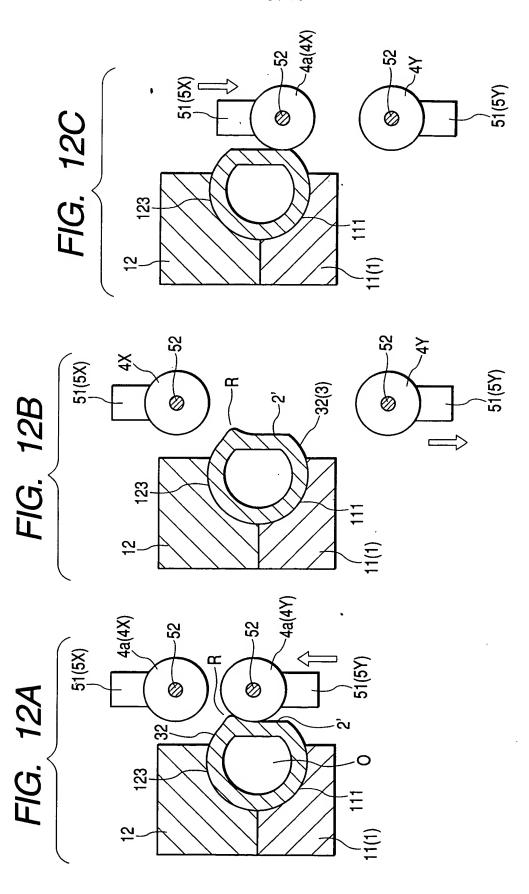

8/16

Q76609
10/626,739 Filed: July 25, 2003
Hiyoshi ISHIKAWA, et al.
Darryl Mexic(202) 293-7060
METHOD OF WORKING RECESSED PORTION
HEADREST STAY AND PRESS APPARATUS FOR
WORKING RECESSED PORTION IN HEADREST STAY



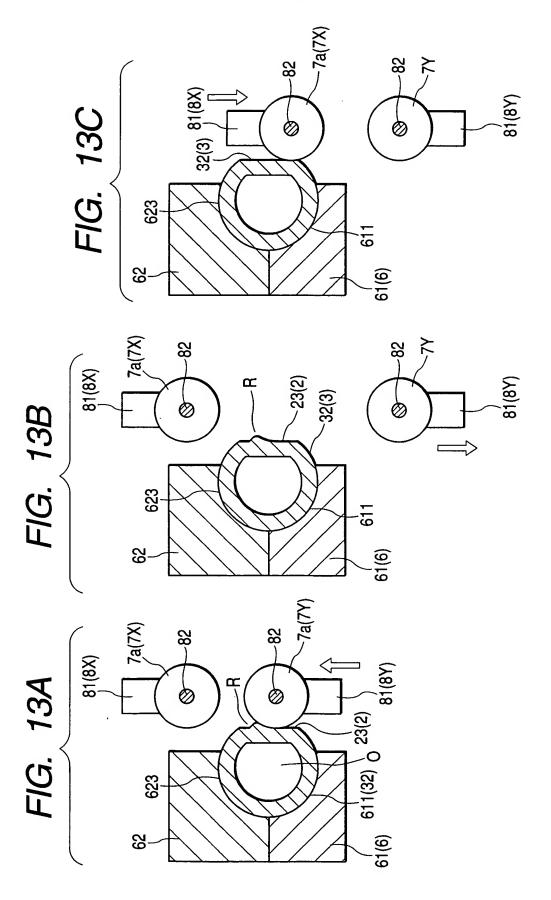

10 / 16

FIG. 14

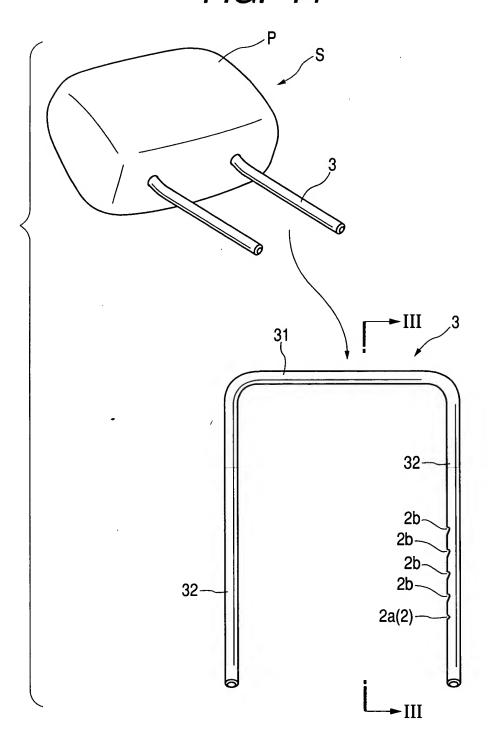
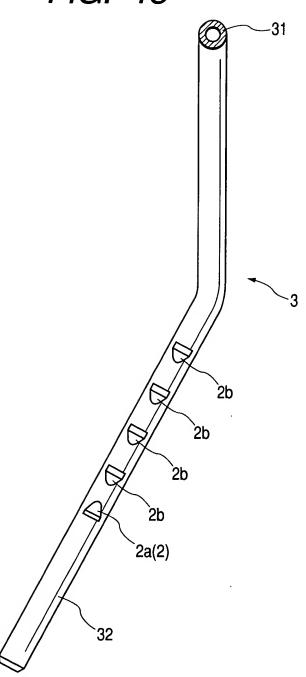


FIG. 15



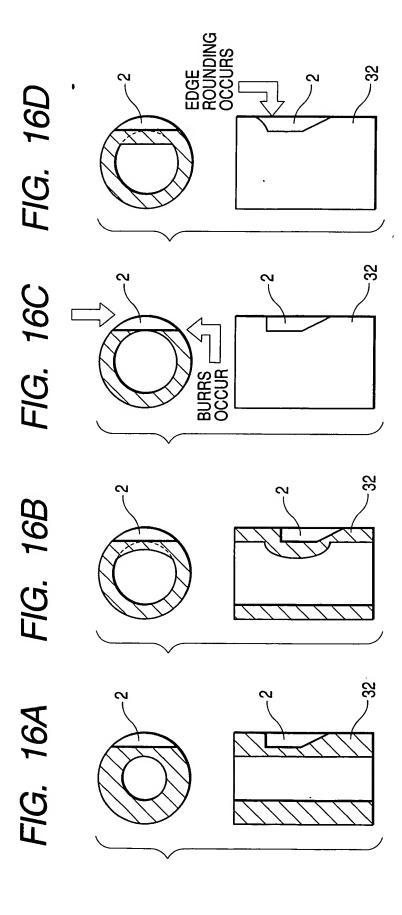


FIG. 17A


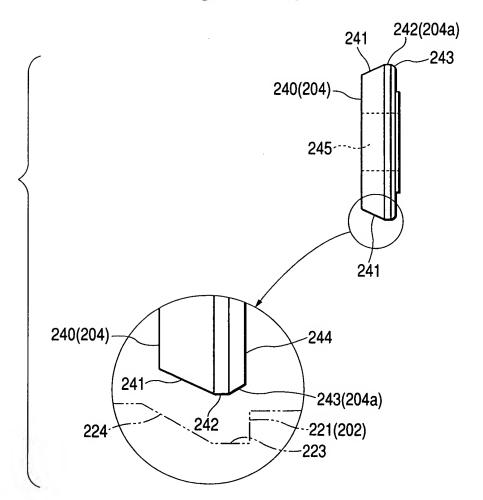


FIG. 17B



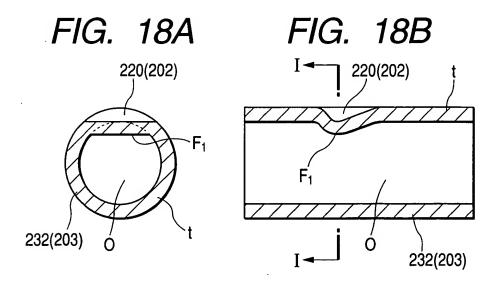
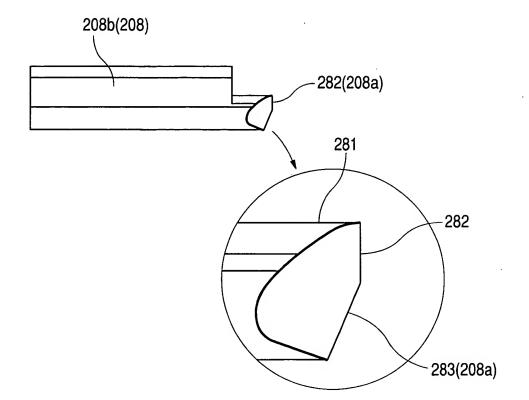


FIG. 19

232(203)
211a(211)
211b(201)

FIG. 20





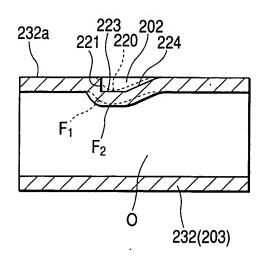


FIG. 22

